

INSTRUCTION



50-2016



Flat Polymero

311947.002.4.76



IP 40 IK10
 220 - 240 V / 50 - 60 Hz
 5 x 1,5 mm²
 2,50 mm²

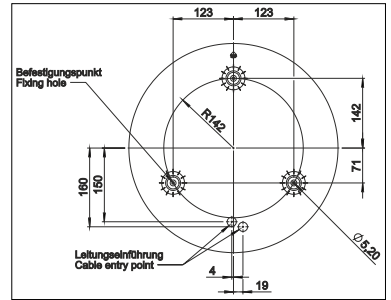








311947.002.4.76	D 460, H 120	LED	21 W	2,69 kg
Φ	EEK _{LED}	EEK	CRI	CCT
2100 lm	A+	A+	83	4000K
B10	B16	C10	C16	
77	124	77	124	0,1 A



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
 The luminaire must be used with its complete protective covers only.




RZB
Rudolf Zimmermann,
Bamberg GmbH
 Rheinstraße 16
 D-96052 Bamberg
 Deutschland
 Telefon +49 951/79 09-0
 Telefax +49 951/79 09-198
 www.rzb.de
 info@rzb-leuchten.de

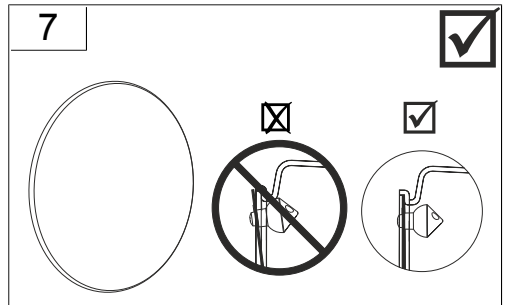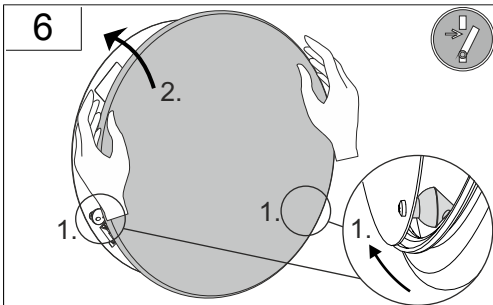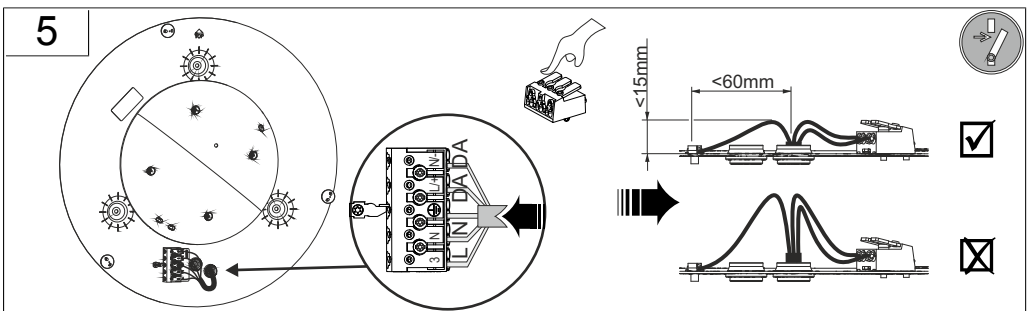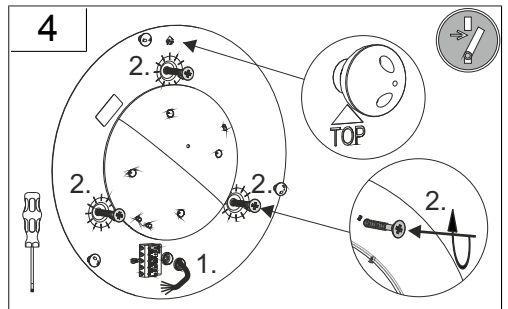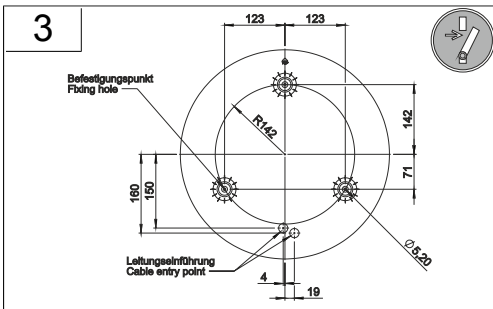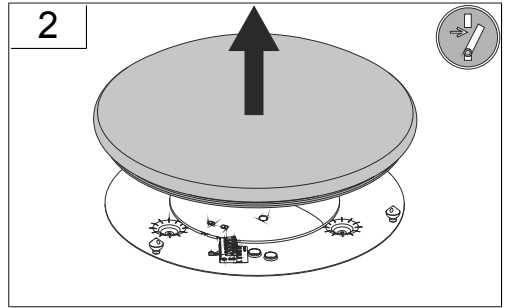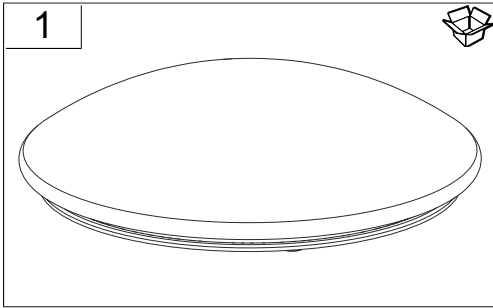



a

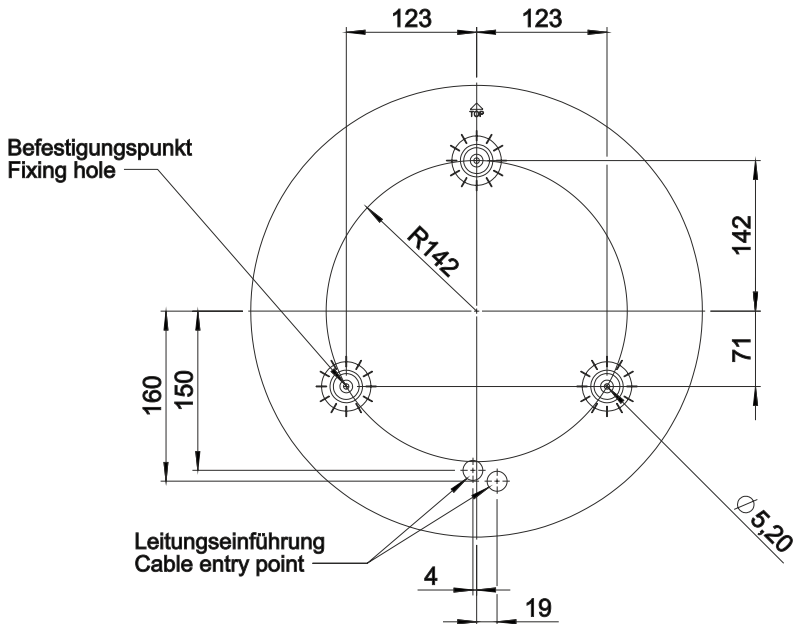












b

DIN 4844



Vor Wartung oder Reparatur freischalten/
power off before maintenance or repair

	 +		
	981805.002	D 490, H 19	426 g
	981805.004	D 490, H 19	426 g
	981805.0042	D 490, H 19	411 g

	 		
	08-311165.022	Ersatzdiffusor PC D 460	0,65 kg