


Verschlusschraube	Polyamid PA6 GF30 V-0
Anschlussgewinde	metrisch, nach EN 60423




Eigenschaften

	<ul style="list-style-type: none"> zum sicheren Verschließen einer nicht benutzten Gewinde- oder Durchgangsbohrung
Temperaturbereich	-55 °C +120 °C
Schutzart	IP55

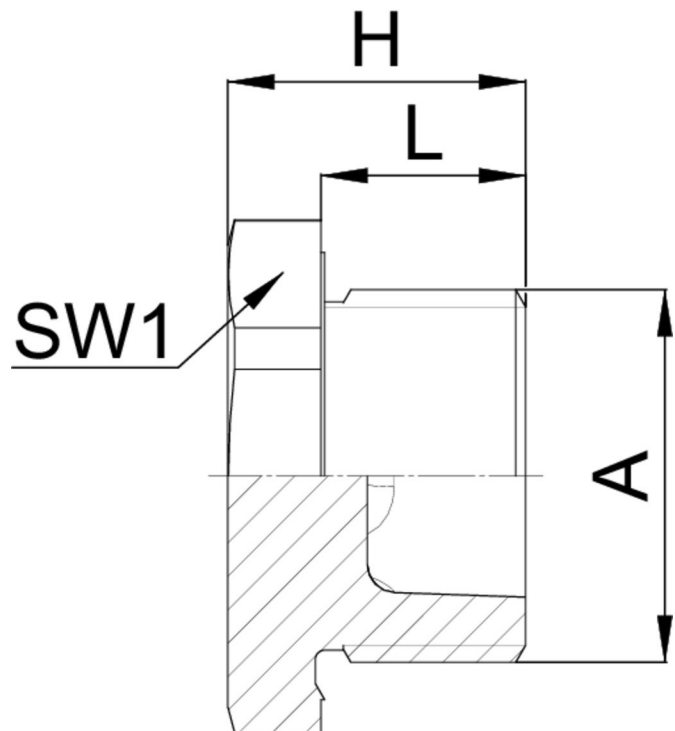


Merkmale

 RAL 9005

A	L	SW1	H		Art.-Nr.
M12x1,5	10	16	15	100	V301-1012-01
M16x1,5	10	21	15	100	V301-1016-01
M20x1,5	11	25	16	100	V301-1020-01
M25x1,5	11,5	30	17,5	100	V301-1025-01
M32x1,5	13	37	20	50	V301-1032-01
M40x1,5	13	46	20	25	V301-1040-01
M50x1,5	15	56	23	25	V301-1050-01
M63x1,5	15	69	23	25	V301-1063-01



RAL 7035

A	L	SW1	H		Art.-Nr.
M12x1,5	10	16	15	100	V301-1012-11
M16x1,5	10	21	15	100	V301-1016-11
M32x1,5	13	37	20	50	V301-1032-11