
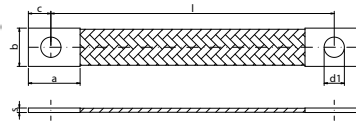


FLEXIBLE KUPFERBÄNDER



Werkstoff:
 Verbindung: Cu-ETP UNI EN 1652
 Kupferlitze: Cu-ETP UNI EN 13602
 Oberfläche: galvanisch verzinkt
 wahlweise blank

Querschnitt mm ²	Typen-Nr.		Abmessungen in mm						VE
	blank	verzinkt	a	b	c	d1	s	l	
10	TRF10-150	TRF10-150T	23	17	10	9	2,0	150	25
	TRF10-200	TRF10-200T	23	17	10	9	2,0	200	25
	TRF10-250	TRF10-250T	23	17	10	9	2,0	250	25
16	TRF16-150	TRF16-150T	23	17	10	9	2,5	150	25
	TRF16-200	TRF16-200T	23	17	10	9	2,5	200	25
	TRF16-250	TRF16-250T	23	17	10	9	2,5	250	25
	TRF16-300	TRF16-300T	23	17	10	9	2,5	300	25
	TRF16-350	TRF16-350T	23	17	10	9	2,5	350	25
	TRF16-420	TRF16-420T	23	17	10	9	2,5	420	25
	TRF16-570	TRF16-570T	23	17	10	9	2,5	570	25
	TRF16-660	TRF16-660T	23	17	10	9	2,5	660	25
25	TRF25-150	TRF25-150T	23	23	10	9	3,2	150	25
	TRF25-200	TRF25-200T	23	23	10	9	3,2	200	25
	TRF25-250	TRF25-250T	23	23	10	9	3,2	250	25
	TRF25-300	TRF25-300T	23	23	10	9	3,2	300	25