

N4141

1. USE

German standard socket outlet.
Mechanism supplied with front cover.
Mechanism to be completed with cover plates and supports.
Flush or wall mounting.


2. RANGE

	Designation	Cat. No.
	2 P+E 16 A 250 V socket with earth side contacts Shielded tulip contacts	<input type="checkbox"/> N4141 <input checked="" type="checkbox"/> NT4141 <input checked="" type="checkbox"/> L4141
	2 P+E 16 A 250 V socket with earth side contacts Shielded tulip contacts Automatic clamps	<input type="checkbox"/> N4141AN <input checked="" type="checkbox"/> NT4141AN <input checked="" type="checkbox"/> L4141AN
	2 P+E 16 A 250 V socket with earth side contacts Shielded tulip contacts Automatic clamps	<input type="checkbox"/> N4141MA <input checked="" type="checkbox"/> NT4141MA <input checked="" type="checkbox"/> L4141MA
	2 P+E 16 A 250 V socket with earth side contacts Shielded tulip contacts Red color	<input type="radio"/> L4141R
	2 P+E 16 A 250 V socket with earth side contacts Shielded tulip contacts Orange color	<input type="radio"/> L4141A
	2 P+E 16 A 250 V socket with earth side contacts Shielded tulip contacts Green color	<input type="radio"/> L4141V
	2 P+E 16 A 250 V socket with earth side contacts Shielded tulip contacts Automatic clamps	<input type="checkbox"/> N4141MAP <input checked="" type="checkbox"/> NT4141MAP <input checked="" type="checkbox"/> L4141MAP

Color code:

- White
- Tech
- Anthracite

3. OVERALL DIMENSIONS (mm)

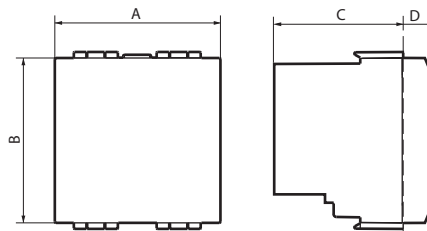

	Screw clamps	Automatic clamps
A	44	44
B	44	44
C	30	32.5
D	11	11

4. CONNECTION

Screws clamps:
Terminal capacity: 2.5 mm²
Stripping length: 11 mm

Automatic clamps for Cat. Nos. 4141AN - 4141MA - 4141MAP:
Terminal capacity: 2.5 mm²
Stripping length: 13 mm

5. TECHNICAL CHARACTERISTICS

■ 5.1 Protection index

Penetration by solid bodies/liquid: IP 21

Impact test: IK 04

■ 5.2 Material characteristics

Satin appearance

Material:

- Socket outlet cover: Polycarbonate

- Halogen free

Self-extinguishing:

- 850° C / 30 s for insulating parts holding live parts in place.

- 650° C / 30 s for other parts made of insulating materials.

UV resistant.

■ 5.3 Electrical characteristics

Voltage: 250 VAC

Current: 16 A

■ 5.4 Climatic characteristics

Storage and operating temperatures: - 5° C to + 35° C

6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Complied with: IEC 60884-1