

DATENBLATT


N 5020 CSP LED

LED Möbeleinbauleuchte, CSP LED

Flache LED Möbeleinbauleuchte mit satiniertem, hitzebeständigem Schutzglas und geringer Einbautiefe.




Technische Daten	Möbeleinbauleuchte				
Bezeichnung	N 5020 CSP LED				
Artikel Nr.	1850209402	1850209479	1850209409	1850209418	1850209410
Farbe	chrom	gold	nickel-gebürstet	schwarz	weiß
Oberfläche	galvanisiert	galvanisiert	galvanisiert	lackiert	lackiert
Lichtfarbe	warmweiß				
Farbtemperatur	ca. 3000 K				
Leuchtmittel	CSP LED				
Ausstrahlwinkel	90°				
Nennspannung	max. 8,6V				
Nennstrom	350mA Konstantstrom				
Nennleistung	3W				
Material	Stahl/Polycarbonat/Glas satiniert				
Lichtstrom	ca. 200 lm				
Energieeffizienzklasse	A++ bis A				
Farbwiedergabe	Ra >90				
Abmessungen (ØxH)	66x18 mm				
Deckenausschnitt (Ø)	58 mm				
Einbautiefe	18 mm				
Gewicht	46 g				
Leuchtenanschluss	30 cm Anschlussleitung mit AMP-Stecksystem 2-polig				
Einbauhinweis	geeignet zur direkten Montage an normal entflammaren Materialien				
Betriebsgerätempfehlung	EL-350mA Serie				

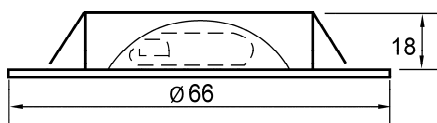

Zubehör (optional): **R 5020 Aufbauring**

Artikel Nr.	Bezeichnung
1850290200	R 5020 Aufbauring chrom
1850290900	R 5020 Aufbauring nickel-gebürstet
1850291000	R 5050 Aufbauring weiß
1850291800	R 5020 Aufbauring schwarz
1850297900	R 5020 Aufbauring gold

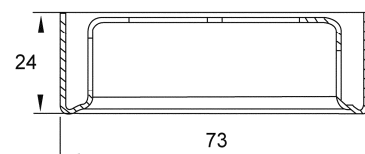

DATA SHEET


N 5020 CSP LED

LED furniture luminaire, CSP LED

Flat LED Downlight for furniture use with satined, heat resistant cover glass and a narrow installation depth.



Specifications	LED Downlight for furniture use				
Type	N 5020 CSP LED				
Part no.	1850209402	1850209479	1850209409	1850209418	1850209410
Colour	chrome	gold	brushed nickel	black	white
Surface	galvanized	galvanized	galvanized	painted	painted
Light colour	warm white				
Colour temperature	ca. 3000 K				
Light source	CSP LED				
Beam angle	90°				
Rated voltage	max. 8.6V				
Rated current	350mA constant current				
Rated power	3W				
Material	steel/polycarbonate/glass satined				
Luminous flux	ca. 200 lm				
Energy efficiency class	A++ to A				
Colour rendering	Ra >90				
Dimensions (ØxH)	66x18 mm				
Ceiling cut-out (Ø)	58 mm				
Installation depth	18 mm				
Weight	46 g				
Connection of luminaire	30 cm connecting cable with AMP plug-system 2-pole				
Installation note	suitable for direct mounting on normal flammable surfaces				
Recommendation LED driver	EL-350mA series				

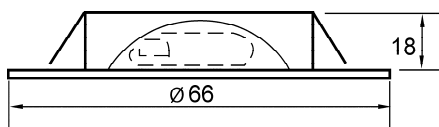

Accessories (optional): **R 5020 Surface mounted housing**

Part no.	Type
1850290200	R 5020 Surface mounted housing chrome
1850290900	R 5020 Surface mounted housing brushed nickel
1850291000	R 5050 Surface mounted housing white
1850291800	R 5020 Surface mounted housing black
1850297900	R 5020 Surface mounted housing gold

