


Alpine Version

Projektstandort: AT
 Schneelast: $sk = 2,8 \text{ kN/m}^2$
 Windlast: $qp = 0,65 \text{ kN/m}^2$

Kąt / Winkel / Angle	Otwór (od środka) / Loch (von innen) / Hole (from the center)
20°	1-2
25°	3-4

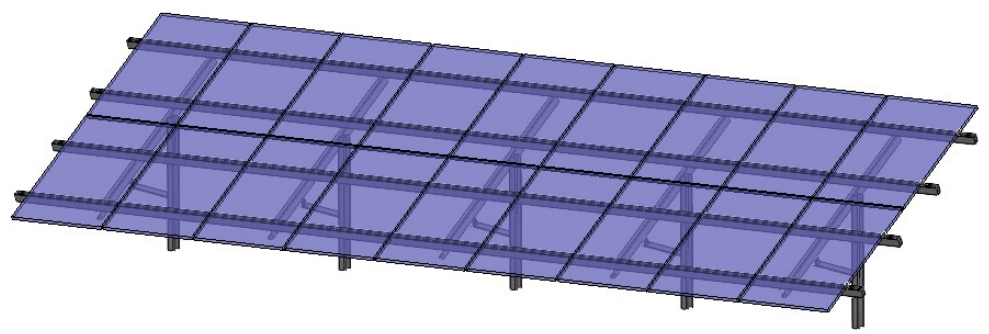

NARYS.	IMIE I NAZWISKO	PODPIS	DATA	INDEX
SPRAWDZ.	Rafał Nowak		2020-11-26	Index C
ZATWIER.				2x9
WYPROD.				
Z.JAKOŚCI				
				MATERIAŁ:
				WAGA:

TYTUŁ:




Metal Components

NR RYSUNKU: Freiland 2.2


A3

Tisch 2x9

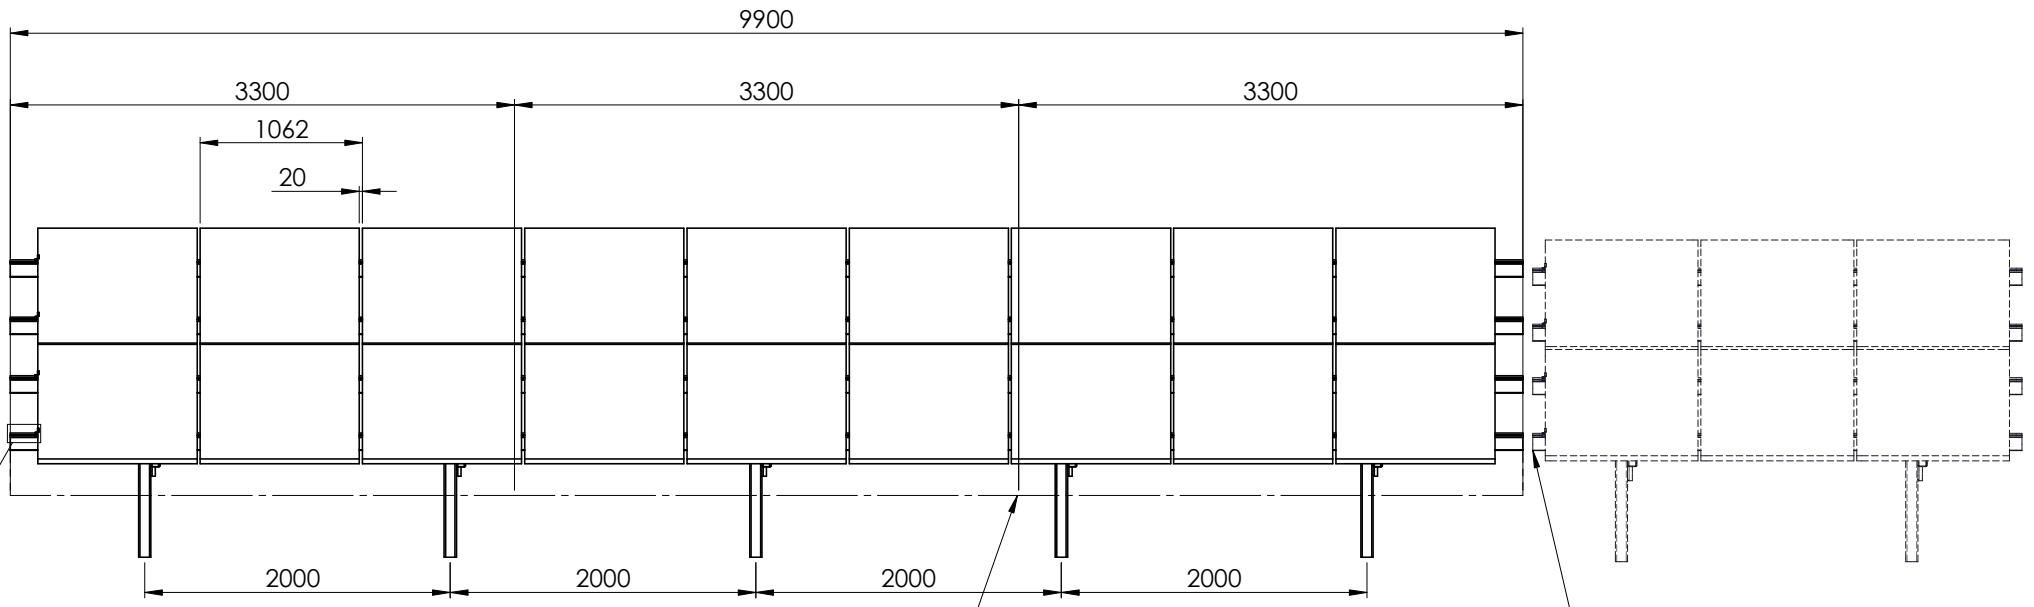

Verbindung mit PV und schrauben


Verbindung mit PV und schrauben

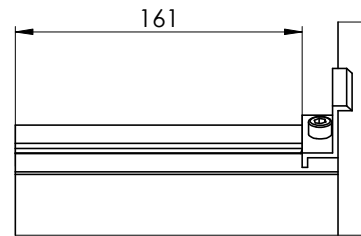

DETAL C

Alpine Version

Bei Kontaktstellen Stahl - Alu
EPDM Gummi Verwenden (Trennung)

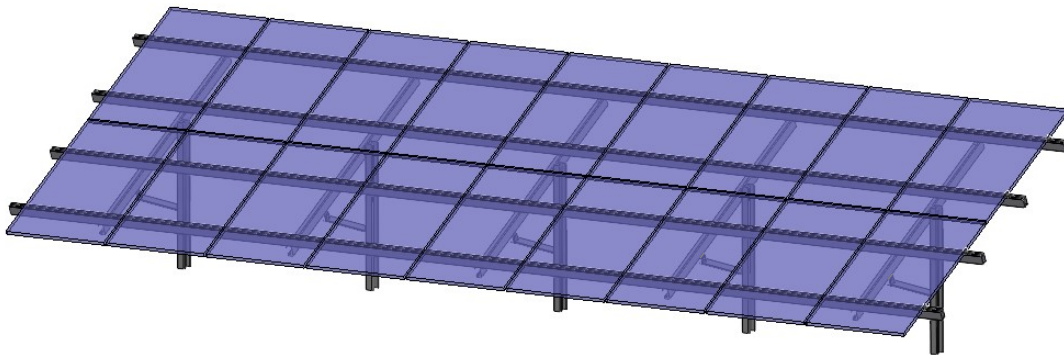

	IMIĘ I NAZWISKO	PODPIS	DATA	INDEX	TYTUŁ:
NARYS.	Rafał Nowak		2020-11-26	Index C	 Freiland 2.2
SPRAWDZ.				2x9	
ZATWIER.				MATERIAŁ:	
WYPROD.				WAGA:	
Z.JAKOŚCI					NR RYSUNKU
					A3