


Aufbau


Verschlusschraube	Messing CuZn39Pb3, galv. vernickelt
Anschlussgewinde	metrisch, nach EN 60423

Eigenschaften

	<ul style="list-style-type: none"> zum sicheren Verschließen einer nicht benutzten Gewinde- oder Durchgangsbohrung
Temperaturbereich	bis +200°C
Schutzart	IP54

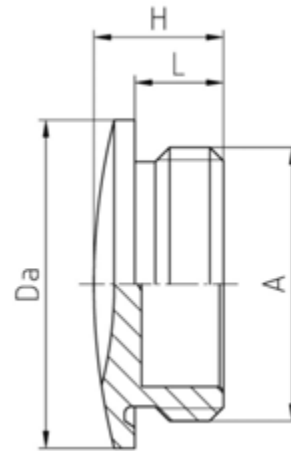

Merkmale

A	L	H	Da		Art.-Nr.
	mm	mm	mm	Stück	
M12x1,0	4,5	7,5	16	100	10.1210
M12x1,5	5	8	16	100	10.1215
M16x1,5	6	9	20	100	10.1615
M20x1,5	6,5	9,5	24	100	10.2015
M25x1,5	7	11	28	100	10.2515
M32x1,5	8	12	35	50	10.3215
M40x1,5	8	12	45	50	10.4015
M50x1,5	9	15	55	25	10.5015
M63x1,5	10	16	68	10	10.6315