

HD4037M2

1. USE

Pushbutton, basic control devices for lighting and other controls.

2. RANGE

PUSHBUTTON 10 A	Cat. No.
Pull-cord pushbutton 1 P (NC) 10 A - 250 Vac	<input type="checkbox"/> HD4033 <input type="checkbox"/> HC4033 <input type="checkbox"/> HS4033
Pushbutton 1 P (NC) 10 A - 250 Vac prepared for interchangeable rockers	<input type="checkbox"/> HD4034 <input type="checkbox"/> HC4034 <input type="checkbox"/> HS4034
Pushbutton 1 P (NC) 10 A - 250 Vac prepared for interchangeable rockers - 2 modules	<input type="checkbox"/> HD4034M2 <input type="checkbox"/> HC4034/2 <input type="checkbox"/> HS4034/2
Double pushbutton 1 P (NO) + 1 P (NO) 10 A - 250 Vac	<input type="checkbox"/> HD4036 <input type="checkbox"/> HC4036 <input type="checkbox"/> HS4036
Double pushbutton 1 P (NO) + 1 P (NO) 10 A - 250 Vac - 2 modules	<input type="checkbox"/> HD4036M2 <input type="checkbox"/> HC4036/2 <input type="checkbox"/> HS4036/2
Interlocked double pushbutton 1 P (NO) + 1 P (NO) 10 A - 250 Vac	<input type="checkbox"/> HD4037 <input type="checkbox"/> HC4037 <input type="checkbox"/> HS4037
Interlocked double pushbutton 1 P (NO) + 1 P (NO) 10 A - 250 Vac - 2 modules	<input type="checkbox"/> HD4037M2 <input type="checkbox"/> HC4037/2 <input type="checkbox"/> HS4037/2
Pushbutton 2 P (NO) 10 A - 250 Vac with independant contacts for traditional hospital system	<input type="checkbox"/> HD4044 <input type="checkbox"/> HC4044 <input type="checkbox"/> HS4044

AXIAL PUSH-BUTTONS WITH DIFFUSER


Pushbutton 1 P (NO) 10 A - 250 Vac with bell symbol	<input type="checkbox"/> HD4042 <input type="checkbox"/> HC4042 <input type="checkbox"/> HS4042
Pushbutton 1 P (NO) 10 A - 250 Vac with bell symbol 2 modules	<input type="checkbox"/> HD4042M2 <input type="checkbox"/> HC4042/2 <input type="checkbox"/> HS4042/2

2. RANGE (continued)

AXIAL PUSH-BUTTONS WITH DIFFUSER (continued)	Cat. No.
Pushbutton 1 P (NO) 10 A - 250 Vac with lamp symbol	<input type="checkbox"/> HD4043 <input type="checkbox"/> HC4043 <input type="checkbox"/> HS4043
Pushbutton 1 P (NO) 10 A - 250 Vac with lamp symbol - 2 modules	<input type="checkbox"/> HD4043M2 <input type="checkbox"/> HC4043/2 <input type="checkbox"/> HS4043/2
ROCKER PUSH-BUTTONS WITH SYMBOL	Cat. No.
Pushbutton 1 P (NO) 10 AX - 250 Vac - marked press	<input type="checkbox"/> HD4055P <input type="checkbox"/> HC4055P <input type="checkbox"/> HS4055P
Pushbutton 1 P (NO) 10 AX - 250 Vac - marked bell	<input type="checkbox"/> HD4055B <input type="checkbox"/> HC4055B <input type="checkbox"/> HS4055B

Color code:
 White Tech Anthracite

3. OVERALL DIMENSIONS (mm)

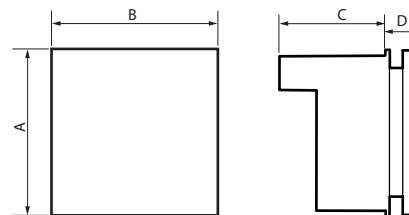

References	A	B	C	D
4033	45	22.5	24	9.5
4034	45	22.5	34	9.5
4034M2	45	45	29	9.5
4036 - 4037	45	22.5	28	9.5
4036M2 - 4037M2	45	45	28	9.5
4042M2 - 4043M2	45	45	28	9.5
4042 - 4043 - 4044	45	22.5	34	9.5
4055P - 4055B	45	22.5	24.5	9.5

4. CONNECTION

Stripping length (rigid or flexible cables): 12 mm for screwless terminals
9 mm for screw terminals

5. TECHNICAL CHARACTERISTICS

■ 5.1 Protection index

Penetration by solid bodies/liquid: IP 21 D
Impact test: IK 04

■ 5.2 Material characteristics

Material: Polycarbonate for mechanism case
PC for key cover
Colour: Anthracite, White, Tech
Halogen free.
UV resistant.
Self-extinguishing:
+ 850° C / 30 s for insulating parts holding live parts in place.
+ 650° C / 30 s for other parts made of insulating materials.

■ 5.3 Electrical characteristics

Voltage: 250 VAC
Current: 10 A

■ 5.4 Climatic characteristics

Storage and operating temperatures: - 5° C to + 35° C

6. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
Refer to e. catalogue.