










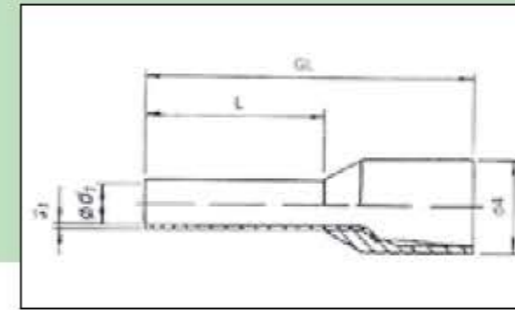



















Aderendhülsen Farbserie I (französisch)

- isoliert
- Elektrolyt-Kupfer, verzinkt
- Abmessungen nach DIN 46228. Teil 4
- Farbserie I, französisch



Art. Nr.	LQ		d1	d2	s	GL	I	kg/100		VE	
270014	0,25	gelb	0,8	2,3	0,15	10,4	6	0,005		100	
270015		gelb	0,8	2,3	0,15	10,4	6	0,023		500	
270016	0,34	grün	0,8	2,5	0,15	12,4	6	0,022		500	
270800	0,5	weiß	1,1	3,1	0,15	14,0	8	0,010		100	
270801		weiß	1,1	3,1	0,15	14,0	8	0,009		500	
270021	0,75	blau	1,25	3,3	0,15	14,5	8	0,021		100	
270022		blau	1,25	3,3	0,15	14,5	8	0,021		500	
270804	1	rot	1,5	3,5	0,15	14,6	8	0,014		100	
270805		rot	1,5	3,5	0,15	14,6	8	0,009		500	
270808	1,5	schwarz	1,7	4,0	0,15	14,6	8	0,014		100	
270027		schwarz	1,7	4,0	0,15	24,4	18	0,022		100	
270028		schwarz	1,7	4,0	0,15	24,4	18	0,022		500	
270029	2,5	grau	2,3	4,9	0,15	15,0	8	0,020		100	
270030		grau	2,3	4,9	0,15	15,0	8	0,020		500	
270031		grau	2,3	4,9	0,15	21,0	18	0,028		100	
270032		grau	2,3	4,9	0,15	21,0	18	0,028		500	
270033	4	orange	2,9	5,6	0,2	17,7	10	0,029		100	
270034		orange	2,9	5,6	0,2	17,7	10	0,029		500	
270036		orange	2,9	5,6	0,2	25,7	18	0,040		100	
270038	6	grün	3,6	7,0	0,2	20,0	12	0,043		100	
270040		grün	3,6	7,0	0,2	26,0	18	0,065		100	
270042	10	braun	4,6	8,4	0,2	21,5	12	0,046		100	
270044		braun	4,6	8,4	0,2	27,5	18	0,073		100	
270046	16	elfenbein	6,0	9,6	0,2	24,2	12	0,081		100	
270048		elfenbein	6,0	9,6	0,2	28,2	18	0,103		100	
270049	25	schwarz	7,3	12,0	0,2	30,0	16	0,070		50	
270050		schwarz	7,3	12,0	0,2	32,0	18	0,079		50	